

PRODUCT DESCRIPTION



J1100^{REV}

TRACK-MOUNTED JAW CRUSHER

Performance 80 to 300 t/h

Transport weight 44,50 t / 98,110 lbs

Hydrostatic drive





J1100 REV

TECHNICAL DETAILS

Inlet opening: 1060 x 800 mm / 42" x 31 1/2"

Performance: 80 to 300 t/h (depending on Material)

Drive: Tier 3a / Stage V (187 kW) Diesel engine CAT C7

Crusher drive: hydrostatic - constant throughput

Gap adjustment: fully hydraulic / 30 - 1 3/16" to 160mm - 6 1/3"

Main discharge belt: 1000 mm - 39 3/8"

Feed hopper: 6,0 m³ - 7.8 yd³/ **Loading height:** 4,2 m - 13'9"

Vibration chute: 1,05 x 2,30 m / 3'5" x 7'7" (2-deck pre-screening)

Caterpillar crawler: Type S15/33 L=450


Weight without the options: 44,5 t / 98.110 lbs

STANDARD EQUIPMENT

- > Radio remote control
- > Hydraulically lowerable main discharge belt
- > Hydraulically foldable hopper walls

OPTIONS

- > Side conveyor belt
- > Magnetic separator
- > Dust suppression system
- > Reversal of crushing direction
- > Automatic central lubrication
- > Diesel fuel pump
- > Discharge chute

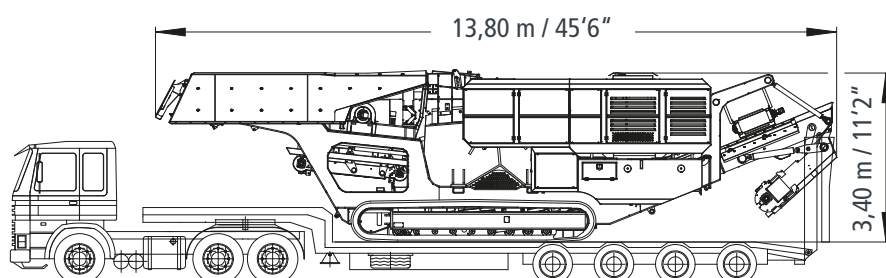


Transport dimensions J106 rev

Length:	13,80 m / 45'6"
Width:	2,80 m / 9'3"
Height:	3,40 m / 11'2"
*Weight:	46,60 t 102,740lbs

Working Dimensions J106 rev

Length:	18,00 m / 59'1"
Width:	7,75 m / 25'5"
Height:	4,10 m / 13'6"

*with Magnetic separator, Side conveyor, Dust suppression

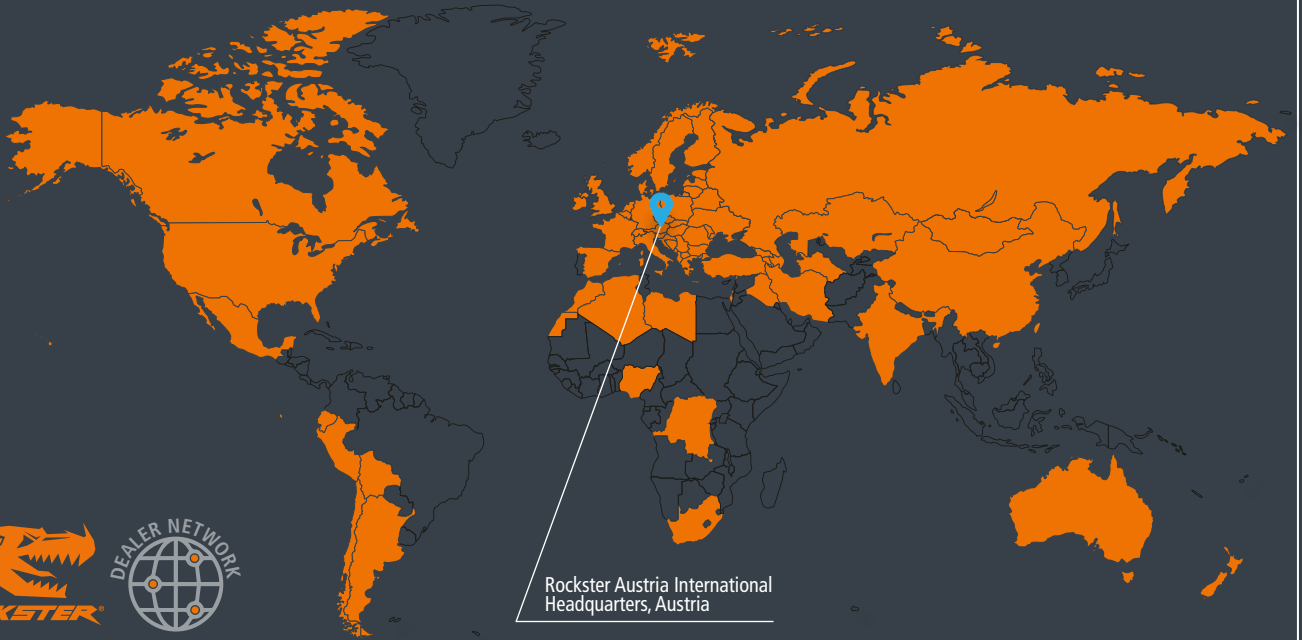

Rockster Austria International
Headquarters, Austria

SOLD IN MORE THAN 50 COUNTRIES WORLDWIDE

**COMPETENCE.
PROGRESS.
PARTNERSHIP.**

Rockster Austria International GmbH | Matzelsdorf 72, 4212 Neumarkt i.M., Austria
Tel.: +43 720 70 1212 | office@rockster.at | www.rockster.at

